


Kit includes : base, bungee pole set and carry bag (not shown)

①

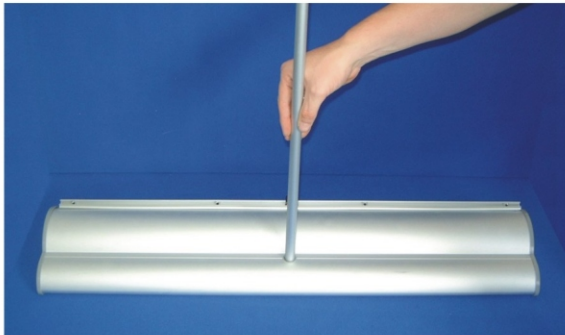


Assemble the bungee pole and insert into the base

②



Lean the bannerstand backwards and extend the banner by lifting the top rail until the complete image is visible

③

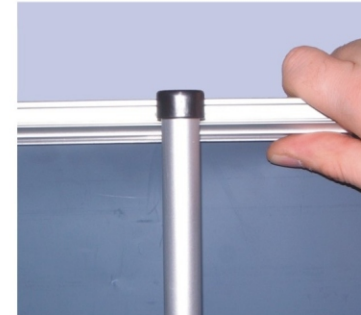

Finally secure the banner by locating the top rail cup over the pole

Technical Specification

Visible graphic area : 2130mm (84") high x 800mm (31.5") or 1000mm (39.5") wide depending upon the version supplied

Note : Add 200mm (8") to the graphic length to allow for the roller
Unit weight inc. carry bag : 4.4kg approx (800mm / 31.5" version)

Guidelines for Graphic substrates

- 1, Material thickness must be between 225 and 300 microns in total (10 to 12 mils U.S spec)
- 2, The substrate must be pliable and suitable for roller bannerstands
- 3, After fitting, the graphic should be left for 24 hours before use to ensure the adhesive bonds sufficiently

Notes

- 1, For graphic fitting please refer to separate instruction sheet UI119
- 2, Take care when lowering the banner to prevent damage to the graphic (do not drop)